

YCS Transcoder

COMPOSITE & S-VIDEO ENCODER AND DECODER

VERSA™
TOOLS

- Composite video to S-video decoder
- S-video to composite video encoder
- NTSC and PAL compatible
- Three-line (NTSC) / five-line (PAL) adaptive comb filter
- Buffered outputs
- Rack-mountable



The Extron YCS Transcoder is a versatile device that simplifies video applications. It serves as both a composite video to S-video decoder and an S-video to composite video encoder.



Extron® Electronics

www.extron.com

DESCRIPTION


The Extron **YCS Transcoder** simplifies many video applications by combining two independent signal conversion processes, composite video to S-video and S-video to composite video, in a compact VersaTools™ enclosure. Accepting either NTSC or PAL video, the YCS Transcoder utilizes a high-quality digital adaptive comb filter (three-line NTSC, five-line PAL) to ensure clean Y/C separation with virtually no chroma noise.

With a composite video input, the YCS Transcoder decodes (separates) composite video into the luminance (Y) and chrominance (C) signal components and outputs S-video. A buffered composite video loop-through is also provided.

With an S-video input, the YCS Transcoder encodes (combines) the Y and C video signals into composite video and outputs composite video. Again, a buffered S-video loop-through is provided.

FEATURES

- Versatile bidirectional design for easy integration
- Independent circuits simultaneously encode S-video and decode composite video
- Each input includes a buffered loop-through
- Three-line NTSC (five-line PAL) digital adaptive Y/C separation filter virtually eliminates chroma noise
- Accepts NTSC or PAL video
- 1U, quarter-rack width metal enclosure
- External international power supply included (part number 70-056-01)

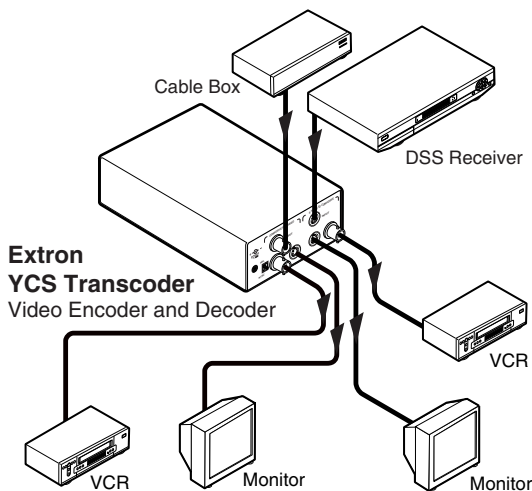

SPECIFICATIONS

VIDEO	
Gain	Unity
Crosstalk	-60dB @ 3.58 MHz
VIDEO INPUT	
Number/signal type	1 NTSC 3.58/PAL S-video 1 NTSC 3.58/PAL composite video
Connectors	1 female 4-pin mini DIN 1 BNC female
Nominal level	1V p-p for Y of S-video, and for composite video 0.3V p-p for C of S-video
Minimum/maximum levels.....	S-video: Y: 0.5V to 2.0V p-p C: 0.2V to 0.6V p-p Composite: 0.5V to 2.0V p-p
Impedance	75 ohms
Return loss	<-40dB @ 0 to 10 MHz
VIDEO OUTPUT	
Number/signal type	2 S-video: 1 decoded from composite input 1 buffered from S-video input 2 composite: 1 encoded from S-video input 1 buffered from composite video input
Connectors.....	(2) 4-pin mini-DIN 2 BNC female
Nominal level	1V p-p for Y of S-video, and for composite video 0.3V p-p for C of S-video
Minimum/maximum levels.....	S-video: Y: 0.5V to 2.0V p-p C: 0.2V to 0.6V p-p Composite: 0.5V to 2.0V p-p
Impedance	75 ohms
GENERAL	
Power.....	100VAC to 240VAC, 50/60 Hz; to 9VDC, 0.6 A external power supply. Product requires 0.3 A.
Rack mount	Yes, with optional rack shelf, part #60-190-01, or 60-604-01
Enclosure type	Metal
Enclosure dimensions	1.75" H x 4.4" W x 6.7" D (1U high, quarter rack width) 4.4 cm H x 11.2 cm W x 17.0 cm D (Depth excludes connectors.)
Product weight	0.8 lbs (0.4 kg)
Shipping weight.....	3 lbs (1.4 kg)
Vibration	ISTA/NSTA 1A in carton (International Safe Transit Association)
Listings.....	UL, CUL
Compliances	CE, FCC Class A
MTBF	30,000 hours
Warranty	3 years parts and labor
Model	Part Number
YCS Transcoder	60-323-02

Specifications are subject to change without notice.



Extron Electronics, USA
1230 South Lewis Street
Anaheim, CA 92805
800.633.9876 714.491.1500
FAX 714.491.1517

Extron Electronics, Europe
Beeldschermweg 6C
3821 AH Amersfoort, The Netherlands
+800.3987.6673 +31.33.453.4040
FAX +31.33.453.4050

Extron Electronics, Asia
135 Joo Seng Rd. #04-01
PM Industrial Bldg., Singapore 368363
+800.7339.8766 +65.6383.4400
FAX +65.6383.4664

Extron Electronics, Japan
Daisan DMJ Bldg. 6F, 3-9-1 Kudan Minami
Chiyoda-ku, Tokyo 102-0074
Japan
+81.3.3511.7655 FAX +81.3.3511.7656