

YCS SW2 A

TWO INPUT, DUAL OUTPUT
TRANSCODING SWITCHER WITH AUDIO

- Digital quad standard decoder/encoder
- Integrated audio switcher
- Autoswitching capabilities
- Time base stabilization
- Contact closure remote control
- Compact, durable metal enclosure
- External international power supply



The Extron YCS SW2 A is a two input, dual output video and audio switcher with built in video transcoding. It simultaneously decodes composite video signals into S-video signals, and encodes S-video signals into composite video signals. The YCS SW2 A is ideal for simplifying signal routing to video projectors and other display devices in A/V systems designed for classrooms, conference rooms, and video conferencing.



Extron® Electronics

www.extron.com

DESCRIPTION


The Extron YCS SW2 A is a two input, dual output video and audio switcher with transcoding capabilities. Using a high-quality, three-line digital comb filter, the YCS SW2 A accepts NTSC 3.58, NTSC 4.43, PAL, or SECAM composite video and decodes the signal into S-video. As an encoder, it is able to combine luma and chroma signals and output a composite video image. Enhanced video processing stabilizes and improves display output from input sources such as consumer VCRs, worn or multi-generation VHS tapes, and other devices with unstable sync signals. An integrated audio switcher provides a discrete audio input for each video source, which can expand the audio input capabilities of many low-cost video projectors.

Ideal for conference rooms, classrooms, and video conferencing applications, the YCS SW2 A is equipped with autoswitching capabilities, which eases use by automatically selecting the active input. In addition, simultaneous composite video and S-video outputs allow for the ability to record and distribute video to the display at the same time. The YCS SW2 A is housed in a compact enclosure and includes tactile, front panel switch buttons for manual input switching, as well as contact closure remote control.

FEATURES

- Digitally decodes composite video input into S-video
- Digitally encodes S-video input into composite video
- Quad standard, digital decoder
- Integrated audio switcher
- Time base stabilization
- Simultaneous composite video and S-video outputs
- Autoswitching capabilities
- Contact closure remote control
- Flexible mounting options
- External international power supply included

APPLICATION DIAGRAM

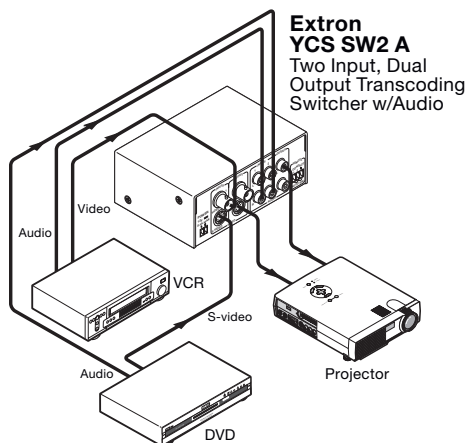

SPECIFICATIONS

VIDEO		
Gain	Unity	
Bandwidth	5 MHz (-3 dB)	
Crosstalk	-60 dB @ 3.58 MHz	
Switching speed	5 ms (max.)	
Standards	NTSC, PAL, SECAM; autodetected	
VIDEO INPUT		
Nominal level	1 Vp-p for Y of S-video and for composite video 0.3 Vp-p for C of S-video	
Minimum/maximum levels	Analog: 0.3 V to 1.5 Vp-p for video and Y with no offset at unity gain	
Impedance	75 ohms	
Return loss	-34 dB for composite video, -27 dB for Y, -31 dB for C @ 5 MHz	
DC offset (max. allowable).....	5.0 V	
Input coupling.....	AC coupled	
VIDEO OUTPUT		
Nominal level	1 Vp-p for Y of S-video and for composite video 0.3 Vp-p for C of S-video	
Minimum/maximum levels	0.3 V to 1 Vp-p for video and Y	
Impedance	75 ohms	
Return loss	-40 dB @ 3.58 MHz	
DC offset	±300 mV with input at 0 offset	
AUDIO		
Gain	Unity	
Frequency response	20 Hz to 20 kHz, ±0.5 dB	
THD + Noise.....	<0.04% @ 1 kHz at nominal level	
S/N	>90 dB at maximum output (unweighted)	
Stereo channel separation.....	>80 dB @ 1 kHz	
AUDIO INPUT		
Impedance	>12k ohms unbalanced, DC coupled	
Nominal level	-10 dBV (316 mVrms), unbalanced	
Maximum level.....	>+10 dBu, at 1% THD+N	
NOTE: 0 dBu = 0.775 Vrms, 0 dBV = 1 Vrms, 0 dBV ≈ 2 dBu		
AUDIO OUTPUT		
Impedance	50 ohms unbalanced	
Maximum level (Hi-Z).....	>+20 dBu, unbalanced at 1% THD+N	
Maximum level (600 ohm)	>+15 dBm, unbalanced at 1% THD+N	
Nominal level	-10 dBV, unbalanced	
CONTROL/REMOTE		
Contact closure.....	1 female 3.5 mm captive screw connector, 3 pole	
Contact closure pin configurations.....	1 = input 1, 2 = input 2, 3 = GND; shorting pins 1, 2, and 3 together = autoswitch mode	
GENERAL		
External power supply	100 VAC to 240 VAC, 50/60 Hz, external, autoswitchable; to 12 VDC, 1 A max., regulated	
Power input requirements.....	12 VDC, 0.4 A	
Rack mount	Yes, with optional VersaTools® rack shelf, part #60-190-20 or 60-604-20.	
Enclosure type	Metal	
Enclosure dimensions	1.7" H x 4.3" W x 3.0" D (1U high, quarter rack wide) 4.3 cm H x 10.9 cm W x 7.6 cm D (Depth excludes connectors.)	
Product weight	0.4 lbs (0.2 kg)	
Shipping weight	3 lbs (2 kg)	
Vibration	ISTA 1A in carton (International Safe Transit Association)	
Listings	UL, CUL	
Compliances.....	CE, FCC Class A, VCCI, AS/NZS, ICES	
MTBF.....	30,000 hours	
Warranty	3 years parts and labor	
NOTE: All nominal levels are at ±10%.		
Model	Version Description	Part Number
YCS SW2 A	Two Input Transcoding Switcher with Audio	60-874-01

Specifications are subject to change without notice.



Extron Electronics, USA
1230 South Lewis Street
Anaheim, CA 92805
800.633.9876 714.491.1500
FAX 714.491.1517

Extron Electronics, Europe
Beeldschermweg 6C
3821 AH Amersfoort, The Netherlands
+800.3987.6673 +31.33.453.4040
FAX +31.33.453.4050

Extron Electronics, Asia
135 Joo Seng Rd. #04-01
PM Industrial Bldg., Singapore 368363
+800.7339.8766 +65.6383.4400
FAX +65.6383.4664

Extron Electronics, Japan
Kyodo Building, 16 Ichibancho
Chiyoda-ku, Tokyo 102-0082
Japan
+81.3.3511.7655 FAX +81.3.3511.7656