



DESCRIPTION

The Extron TeamWork® 400 system is a complete, pre-configured collaboration system for four digital sources. The package includes:

- Four HDMI Show Me™ cables and SW4 HD 4K switcher
- System controller
- Cable Cubby® enclosure with two US AC outlets
- Other necessary system cables

Optional mounting hardware is available to facilitate different collaboration table or work surface designs.

FEATURES

- ▶ Supports groups of up to four users
- ▶ Simple, intuitive operation
- ▶ Pre-configured for fast, easy installation
- ▶ Works with virtually any new or existing furniture system
- ▶ Works with most flat panel displays, laptops, and tablets


For applications needing additional collaboration flexibility than provided with a pre-configured system, custom TeamWork systems are available using the online TeamWork System Builder. The TeamWork System Builder quickly steps you through the creation of a customized system with the ability to choose from a wide range of Extron products to select the switcher, enclosure and Show Me cables or Retractors, and IP Link® control processor that are best suited for the collaboration environment.

SWITCHER	
Maximum data rate	10.2 Gbps (3.4 Gbps/color)
Maximum pixel clock	300 MHz (600MHz for 4K with 4:2:0 chroma subsampling)
Resolution	Up to 1920x1200 or 1080p @ 60 Hz, 12-bit color, 4K (4096x2160) @ 30 Hz, UHD (3840x2160) @ 30 Hz, 4K/UHD @ 60Hz with 4:2:0 chroma subsampling
Serial control port	(1) RS-232, 3.5 mm captive screw connector, 3 pole
Power supply	External, Input: 100-240 VAC, 50-60 Hz Output: 12 VDC, 1.5 A, 18 watts
Power consumption	
Device	6 watts, 12 VDC
Device and power supply	8 watts, 12 VDC
Enclosure dimensions	1.75" H x 8.75" W x 3.00" D (1U high, half rack wide) (44 mm H x 222 mm W x 76 mm D) (Depth excludes connectors)
SYSTEM CONTROLLER	
Connectors	
Input	1 male IEC power connector, 6" (152 mm)
Output	1 female IEC power connector, 6" (152 mm)
NOTE: 1 male IEC to female Edison adapter is included	
Voltage output	100-240 VAC, 50-60 Hz
Maximum AC load	10 A, 1106 watts at 120 VAC 10 A, 2260 watts at 220 VAC
Serial control port	(1) RS-232, 3.5 mm captive screw connector, 3 pole
Power supply	Internal: Input: 100-240 VAC, 50-60 Hz
Enclosure dimensions	1.7" H x 4.3" W x 8.0" D (1U high, quarter rack wide) (43 mm H x 109 mm W x 203 mm D) (Depth excludes connectors)
CABLE CUBBY	
Min./max. table thickness	0.50" to 2.50" (13 mm to 64 mm)
Top plate (outer rim)	10.57" W x 4.58" D (269 mm W x 116 mm D)
Enclosure depth	4.46" H (113 mm H)
Surface cutout (inside rim)	10.0" W x 4.0" D (254 mm W x 102 mm D)
HDMI SM SHOW ME CABLE	
Standards	High speed HDMI® cable
Overall length	6' (1.8 m) measured neck-to-neck
GENERAL	
Product warranty	3 years parts and labor

For complete specifications, please go to www.extron.com
Specifications are subject to change without notice.

MODEL	VERSION DESCRIPTION	PART #
TeamWork 400	100-240 VAC, with US power connections.....	42-290-01

Application Diagram

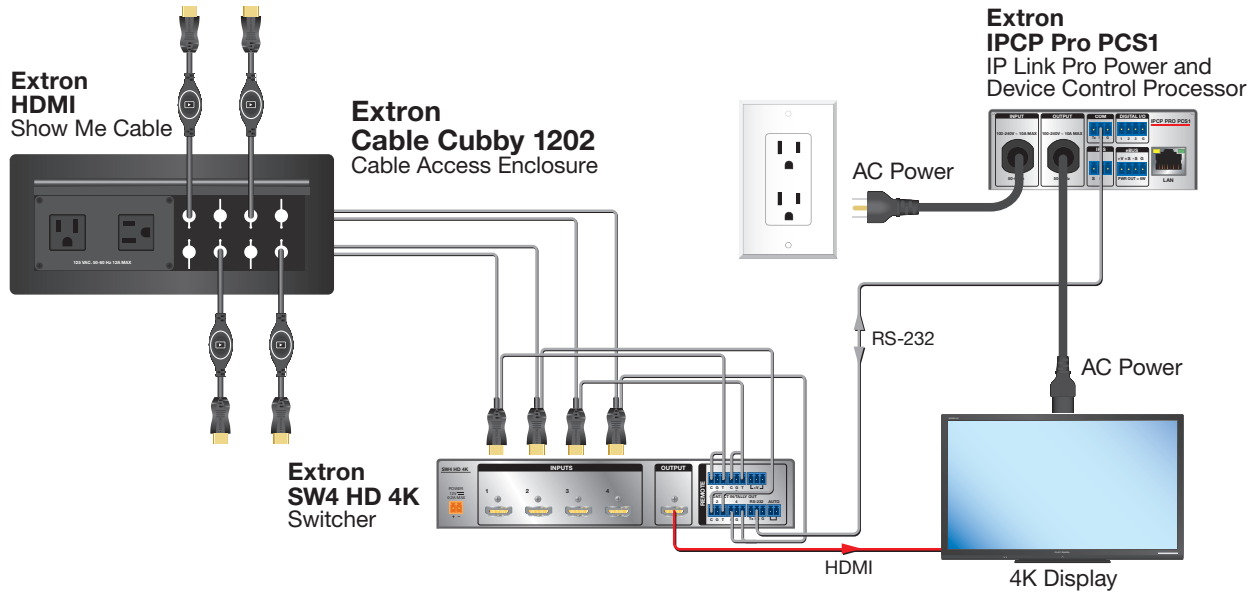

WORLDWIDE SALES OFFICES

Anaheim • Raleigh • Silicon Valley • Dallas • New York • Washington, DC • Toronto • Mexico City • Paris
London • Frankfurt • Madrid • Stockholm • Amersfoort • Moscow • Dubai • Johannesburg • Tel Aviv • Sydney
Melbourne • Bangalore • Mumbai • New Delhi • Singapore • Seoul • Shanghai • Beijing • Hong Kong • Tokyo

www.extron.com