

TLP Pro 1520MG

15" WALL MOUNT
TOUCHLINK PRO TOUCHPANEL

- ▶ 15" edge-to-edge glass, capacitive touchscreen with 1366x768 resolution and 16 million colors
- ▶ Faster processing and more memory
- ▶ Compatible with all IP Link® Pro control processors
- ▶ High resolution video preview with HDMI and XTP inputs
- ▶ Touchpanel receives power and control over a single Ethernet cable, eliminating the need for a local power supply
- ▶ Built-in speakers provide stereo audio
- ▶ Light sensor adjusts screen brightness as the ambient room lighting changes
- ▶ Mounts on a wall, lectern, or any flat surface
- ▶ System connection status indicator provides visual feedback if the touchpanel is not communicating with a control processor
- ▶ Supports TouchLink for iPad and TouchLink for Web



The Extron TLP Pro 1520MG is a 15" wall mount touchpanel with a capacitive, edge-to-edge glass touchscreen. As with all TouchLink® Pro models, this customizable touchpanel features faster processing and more memory. The TLP Pro 1520MG has video preview inputs that support high resolution HDCP-compliant video from HDMI sources and Extron XTP devices. The touchpanel conveniently receives power and communications over a single Ethernet cable. The TLP Pro 1520MG is ideal for control applications requiring a fully-customizable wall mount touchpanel with a large control surface and multi-source video preview.



Extron Electronics
INTERFACING, SWITCHING AND CONTROL


DESCRIPTION

The Extron **TLP Pro 1520MG** is a 15" wall mount touchpanel with a vibrant, 1366x768 capacitive touchscreen. Capacitive technology provides a brighter, more responsive touchscreen with a greater vertical viewing angle. Dual video preview inputs support high resolution video from HDMI sources and Extron XTP devices.

The TLP Pro 1520MG works in conjunction with any Extron IP Link® Pro control processor and is designed for use in AV system applications that require complete, interactive control of conferencing systems, displays, switchers and source devices. TouchLink Pro touchpanels operate using standard network infrastructure and are easy to install with reliable and cost effective Ethernet cable.

All TouchLink Pro touchpanels are customized using Extron GUI Designer software. This powerful interface design software offers ready-to-use resource kits to help design a wide variety of interfaces for rooms and presentation environments.

APPLICATION DIAGRAM

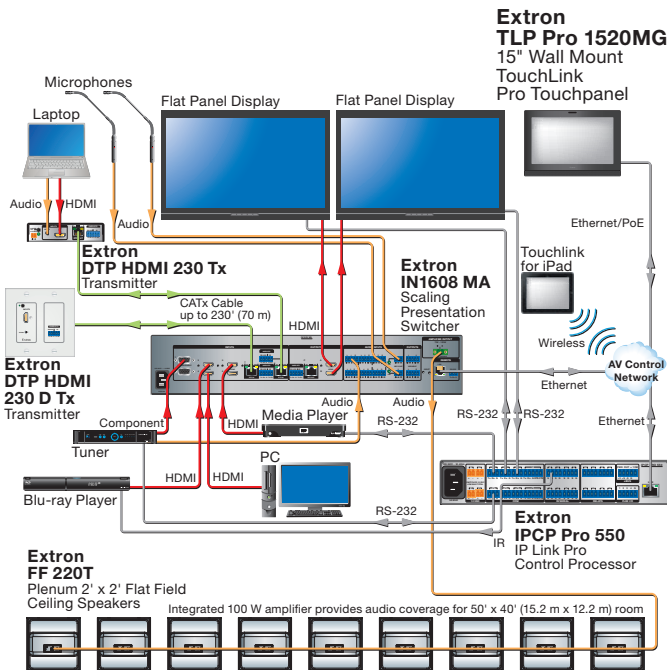

SPECIFICATIONS

DISPLAY		
Screen type	Active matrix TFT color display	
Size	15.6" (39.5 cm), measured diagonally	
Resolution	1366x768	
Aspect ratio	Widescreen	
Color depth	16 million colors	
Contrast	500:1	
MEMORY		
SDRAM	512 MB	
Flash	512 MB	
XTP – INTERCONNECTION BETWEEN TRANSMITTER AND RECEIVER		
Signal transmission distance	330' (100m) using CAT 5e/6/7 UTP or STP cable (24 AWG or better)	
VIDEO INPUT		
Resolution range	Up to 1920x1200*, 2K, or 1080p (HDTV) * reduced blanking	
Number/signal type	1 HDMI (HDCP compliant) 1 XTP	
Standards	DVI 1.0, HDMI, HDCP	
CONTROL – ETHERNET INTERFACE		
Ethernet data rate	100Base-T, half/full duplex with autodetect	
Protocol	DHCP, DNS, HTTP, HTTPS, ICMP, SFTP, SSH, TCP/IP, UDP/IP	
CONTROL – USB		
Number/signal type	2 high-speed USB 2.0 devices	
USB standards	USB 2.0, USB 1.1, USB 1.0 compatible	
USB data rates	Low speed (1.5 Mbps), full speed (12 Mbps)	
AUDIO OUTPUT – SPEAKER		
Speaker output	2 speakers (stereo), 86 dB SPL, 0.1 watt, 0.1 m, half space	
AUDIO OUTPUT – LINE LEVEL		
Number/signal type	1 stereo, unbalanced	
GENERAL		
Power supply	External Input: 100-240 VAC, 50-60 Hz Output (power injector): 56 VDC, 0.8 A, 45 watts	
Power input requirements	12 VDC or power injector	
Mounting		
Rack mount	With optional kit	
Furniture or wall mount	With included hardware or optional accessories	
Regulatory compliance		
Safety	CE, c-UL, UL	
EMI/EMC	CE, C-tick, FCC Class A, ICES, VCCI	
Environmental	Complies with the appropriate requirements of RoHS and WEEE.	
Warranty	3 years parts and labor; touchpanel display and overlay components are covered for 1 year	
Model	Version Description	Part number
TLP Pro 1520MG	Black w/PoE Inj - Wall	60-1342-02

For complete specifications, please go to www.extron.com
Specifications are subject to change without notice.

Worldwide Sales Offices

Anaheim • Raleigh • Silicon Valley • Dallas • New York • Washington, DC • Toronto • Mexico City • Paris • London • Frankfurt
Amersfoort • Moscow • Dubai • Johannesburg • New Delhi • Bangalore • Singapore • Seoul • Shanghai • Beijing • Tokyo

UNITED STATES

+800.633.9876
Inside USA/Canada
+1.714.491.1500

EUROPE

+800.3987.6673
Inside Europe
+31.33.453.4040

ASIA

+800.7339.8766
Inside Asia
+65.6383.4400

MIDDLE EAST

+971.4.299.1800