
ZRTP Pro Series

ZOOM ROOMS TOUCHPANELS



The Extron **ZRTP Pro Series** are Zoom-certified 7" and 10" tabletop and wall mount touchpanels. They can operate as either a Zooms Rooms controller or a Zoom Scheduling panel. As a Zoom Rooms controller, users can manage the Zoom Rooms meeting experience. Full featured AV and room control can be added to these using the Extron Control for Zoom Rooms App and an Extron IPCP Pro xi control processor. Place these touchpanels outside a room when running Zoom Rooms Scheduling display mode and they become dynamic room scheduling devices.

- Certified Zoom Rooms controllers and Zoom Scheduling panels
- Provides advanced room and AV controls when paired with an IPCP Pro xi control processor and the Extron Control for Zoom Rooms App
- Support for Zoom Device Management ZDM
- 7" and 10" touchpanels available in both wall mount and tabletop form factors
- Power over Ethernet provides power and communication over a single Ethernet cable
- Proximity detection allows one-click direct sharing via built-in speakers

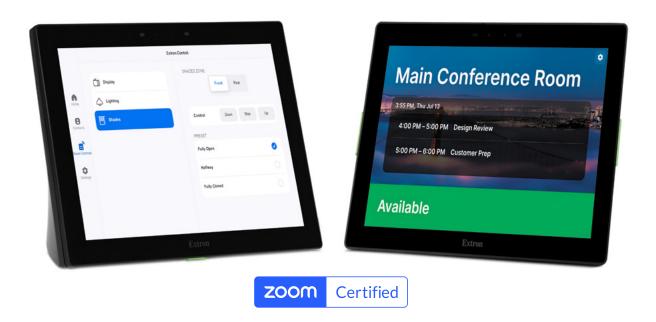

DESCRIPTION


ZRTP Pro Series touchpanels and the Extron Control for Zoom Rooms App enable the deployment of the familiar, easy-to-use Zoom collaboration experience combined with the power of Extron control. They work together to create a fully integrated conference and control solution. Now, from the same easy-to-use interface, you can host a video conference and simply tap the screen for full control of lighting, shades, display power, cameras, and more. When used for Zoom Rooms scheduling, the ZRTP Pro Series can be used for any space. Run these touchpanels in the Zoom Rooms scheduling display mode and place them outside of a conference room for room reservations and at-a-glance room occupancy status.

ZRTP Pro Series touchpanels are available in black and include both wall mount and tabletop form factors. They are compatible with all Extron 7" and 10" mounting accessories which allow them to be mounted in multiple locations and on different surfaces. They have a contemporary design which complements the aesthetics of any space.

KEY FEATURES

- Certified Zoom Rooms controllers and Zoom Scheduling panels
- Provides advanced room and AV controls when paired with an IPCP Pro xi control processor and the Extron Control for Zoom Rooms App
- Support for Zoom Device Management ZDM
- 7" and 10" touchpanels available in both wall mount and tabletop form factors
- Power over Ethernet provides power and communication over a single Ethernet cable
- Proximity detection allows one-click direct sharing via built-in speakers

APPLICATION DIAGRAM

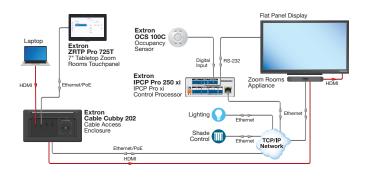

SPECIFICATIONS

DISPLAY			
ZRTP Pro 725M and ZRTP Pro 725T			
Screen type		TFT Active matrix color LCD	
Size		7" (17.8 cm), measured diagonally	
Resolution		1024x600 (WSVGA)	
Aspect ratio		17:10	
Color depth ZRTP Pro 1025M and ZRTP Pro 1025T		24 bit, 16.7 million colors	
Screen type	IU ZNIF FIU 10231	TFT Active matrix color LCD	
Size		10.1" (25.7 cm), measured diagonally	
Resolution		1280x800 (WXGA)	
Aspect ratio		16:10	
Color depth		24 bit, 16.7 million colors	
STORAGE			
SDRAM		2 GB	
Flash		8 GB	
ETHERNET			
Connectors		1 female RJ-45 connector	
USB			
Quantity/type		1 high-speed USB 2.0	
	_ 7DTD DDO 725M	1 AND ZRTP PRO 1025M ONLY	
Quantity/type	- ZNTF FNO 725W	1 digital input (configurable)	
Connectors		(1) 3.5 mm captive screw connector, 2 pol-	e.
AUDIO OUTPU	-	(1) oto mini superio soron somiostor, il por	
Speaker output ZRTP Pro 1025M		2 mono, 89 dB max. SPL @ 0.1 m	
ZRTP Pro 725M, 725T, and 1025T		1 mono, 89 dB max. SPL @ 0.1 m	
GENERAL			
Sensors Motion			
00110010		Light	
Power input require	ements	Power over Ethernet (PoE 802.3af, class 3))
Auxiliary power output			
USB 5 VDC, 275 mA			
Enclosure dimensions ZRTP Pro 725M		5.05" H x 7.24" W x 1.20" D	
ZRTP PIO 7 20101		(128 mm H x 184 mm W x 30 mm D)	
		Touchpanel projects 1.01" (26 mm) from the	he mounting
		surface	no mounting
ZRTP Pro 725T		4.78" H* x 7.12" W x 3.53" D	
		(122 mm H* x 181 mm W x 90 mm D)	
ZRTP Pro 1025M		6.84" H x 10.13" W x 1.26" D	
		(174 mm H x 257 mm W x 32 mm D)	
		Touchpanel projects 0.65" (17 mm) from the surface	ne mounting
ZRTP Pro 1025T		6.40" H x 10.10" W x 4.15" D	
21111 110 10231		(163 mm H x 257 mm W x 105 mm D)	
Regulatory compliance		CE, C-Tick, c-UL,FCC Class B, ICES, RoHS, UL, VCCI, WEEE	
		3 years parts and labor; touchpanel display and overlay	
		components are covered for 1 year	
NOTE: All nominal levels are at ±10%.			
Model	Version Description	T 1	Part number
ZRTP Pro 725T 7" Tabletop Zoom Rooms T		•	60-1562-212
ZRTP Pro 1025T 10" Tabletop Zoom Rooms ZRTP Pro 725M 7" Wall Mount Zoom Room		•	60-1565-212 60-1563-212
ZRTP Pro 725M ZRTP Pro 1025M	10" Wall Mount Zoom Ro		60-1566-212
ZIIII I IV I UZUM	10 Wall WOUTH ZOUTH NO	omo rouonpanoi	00 1000-212

For complete specifications, please go to www.extron.com Specifications are subject to change without notice.

