

Specifications

AC Net AAP

General

Power

AC Net AAP USA model..... 125 VAC, 50-60 Hz, 6 A max.

AC Net AAP World models 220-240 VAC, 50-60 Hz, 6 A max.

Temperature/humidity Storage: -40 to +158 °F (-40 to +70 °C) / 10% to 90%, noncondensing
 Operating: +32 to +122 °F (0 to +50 °C) / 10% to 90%, noncondensing

Mounting Rack or furniture mountable with optional AAP mounting frames


Enclosure type Metal

Enclosure dimensions

AC Net AAP USA model

Faceplate..... 1.4" H x 3.5" W x 0.1" D (3.5 cm H x 8.9 cm W x 0.3 cm D)
 (double space AAP plate)


Isolation enclosure 1.2" H x 1.4" W x 2.9" D (3.0 cm H x 3.6 cm W x 7.4 cm D)
 With AC power cord attached, allow at least 5.0" (12.7 cm) depth in furniture.

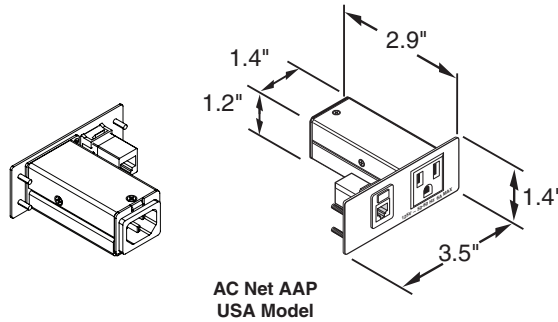

AC Net AAP World models

Faceplate..... 2.1" H x 3.5" W x 0.1" D (5.3 cm H x 8.9 cm W x 0.3 cm D)
 (three space AAP plate)

Isolation enclosure 1.9" H x 1.8" W x 3.0" D (4.9 cm H x 4.6 cm W x 7.7 cm D)
 With AC power cord attached, allow at least 5.0" (12.7 cm) depth in furniture.

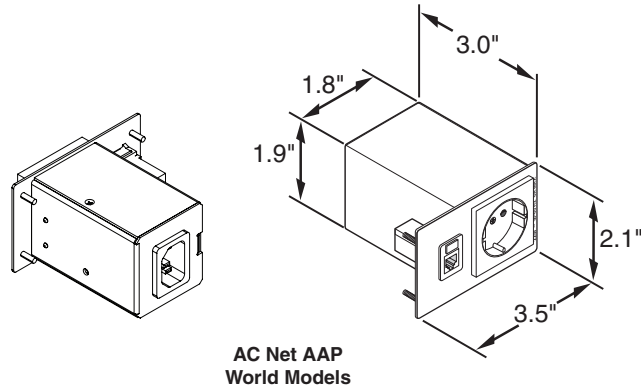

Product weight

AC Net AAP USA model..... 0.2 lb (0.1 kg)

AC Net AAP World models 0.5 lb (0.2 kg)

Shipping weight 1 lb (1 kg)

Vibration ISTA 1A in carton (International Safe Transit Association)

Regulatory compliance

Safety

AC Net AAP USA model c-UL, UL

AC Net AAP World models .. CE

Environmental..... Complies with the appropriate requirements of RoHS and WEEE.

Warranty 3 years parts and labor

NOTE: All nominal levels are at $\pm 10\%$.

NOTE: Specifications are subject to change without notice.

8.1-090915-D7