

Specifications


KNX 100G

Ethernet Control

Connections	1 female RJ-45 connector
Ethernet data rate	10Base-T
Ethernet protocol	ARP, ICMP, IGMP, UDP/IP, DHCP, and Auto IP
Tunneling connections	Up to 5 KNXnet/IP Tunneling connections simultaneously
Program control	ETS Software

KNX

Connectors	1
KNX Bus	Medium TP

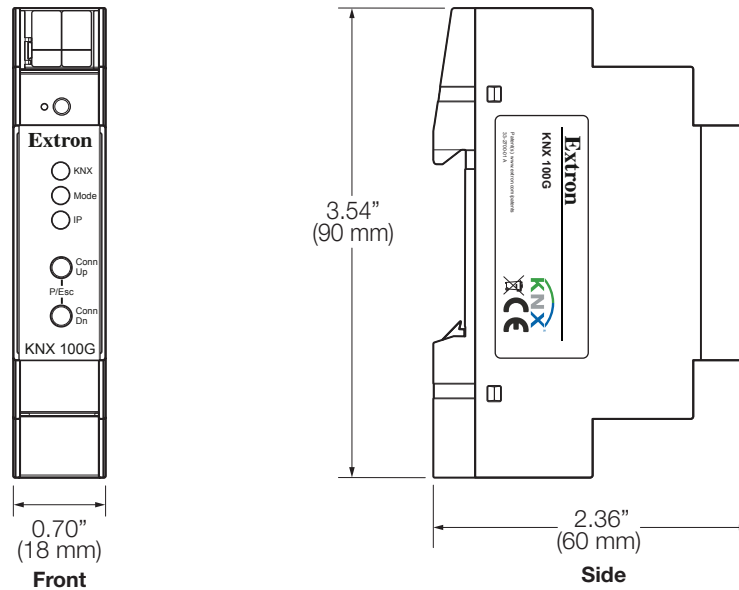

General

Mounting	Mounts onto top hat rail EN 50022 standard
Enclosure material	Plastic
Power supply	Not included
Power input requirements	KNX Bus
Device power consumption.....	15mA
Temperature/humidity.....	Storage: -25 to +70 °C/ 5% to 93%, noncondensing Operating: -5 to 45 °C/ 5% to 93%, noncondensing
Cooling	Convection, no vents
Enclosure dimensions	3.54" H x 0.70" x 2.36" D (90 mm H x 18 mm W x 60 mm D)
Product weight	0.08 lbs (0.40 g)
Vibration.....	ISTA 1A in carton
Regulatory compliance	CE, RoHS, WEEE
Product warranty	3 years parts and labor

NOTE: Specifications are subject to change without notice.

NOTE: Shipping weights and dimensions are available at www.extron.com.