



Specifications

TLP Pro 1022T and TLS 1022T

Display

Screen type	TFT Active matrix color LCD display
Size	10.1" (25.7 cm), measured diagonally
Resolution.....	1024x600, WSVGA
Pixel density.....	118 PPI
Aspect ratio	17:10
Color depth.....	18 bit, 262k colors
Transparency	8 bit
Brightness	440 nits (cd/m ²)
Contrast.....	500:1
Backlight.....	LED
Viewing angle.....	±70° horizontal, +70°/-50° vertical
Touch screen	Capacitive

Memory

RAM	512 MB
Storage.....	512 MB

Communication

Ethernet interface	
Connector	1 female RJ-45 connector
Data rate	10/100Base-T, half/full duplex with autodetect
Protocols.....	DHCP, DNS, HTTP, HTTPS, ICMP, SFTP, SSH, TCP/IP, UDP/IP
Default settings.....	Link speed and duplex level: autodetected IP address = 192.168.254.251 Subnet mask = 255.255.255.0 Default gateway = 0.0.0.0 DHCP = off DNS = 127.0.0.1

Software

TLP Pro 1022T	
Configuration software.....	Global Configurator Plus and Professional, GUI Designer
Programming software	Global Scripter
Control apps	Extron Control, iGVE
Resource management software	GlobalViewer Enterprise
Utilities.....	Toolbelt, Embedded web page
TLS 1022T	
Configuration software.....	Room Agent

Sensors

Motion sensor	On/off
Light sensor	Auto/manual

Specification • TLP Pro 1022T Series and TLS 1022T (Continued)


Audio output

Speaker output	2 stereo, 92 db max SPL @ 0.3m
Frequency response	750 Hz to 20 kHz, ±5 dB
Playback format(s)	
Container format	WAV (Microsoft RIFF)
Encoding	LPCM (uncompressed)
Bit depth	Unsigned 8-bit Signed 16-bit Signed 24-bit Signed 32-bit
Sampling rate	Up to 192 kHz
Audio channels.....	Mono or stereo



General

Power supply	Not included
Power input requirements	Power over Ethernet (PoE 802.3af, class 3)
Power consumption — Power injector (XTP PI 100)	
Device	7.6 watts
Device and power injector	9.5 watts
Temperature/humidity	Storage: -4 to +140 °F (-20 to +60 °C) / 10% to 90%, noncondensing Operating: +32 to +104 °F (0 to +40 °C) / 10% to 90%, noncondensing
Cooling	Convection, vents on rear top
Thermal dissipation — Power injector (XTP PI 100)	
Device	25.9 BTU/hr
Device and power injector	32.4 BTU/hr
Mounting	
Furniture mount	Set on tabletop or with optional accessories
Wall mount	With optional VESA D 75 mm panel mount kit
Adjustment ranges.....	Tilts through a 45° range
Enclosure type	Plastic



Specification • TLP Pro 1022T Series and TLS 1022T (Continued)

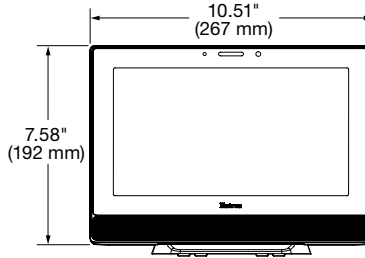


FRONT VIEW

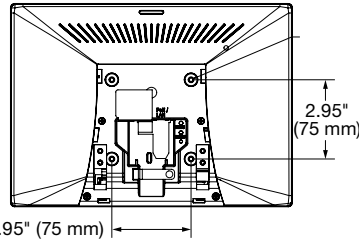

REAR VIEW

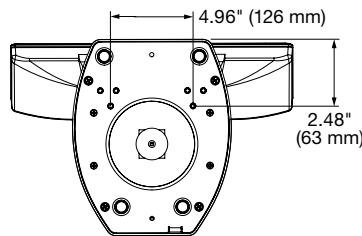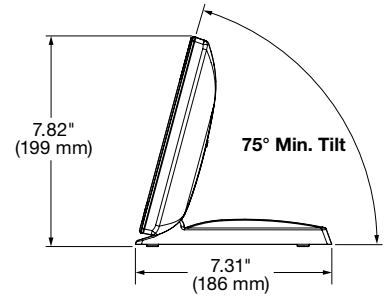

BASE



SIDE VIEW

Enclosure dimensions	7.58" H* x 10.51" W x 7.31" D (193 mm H* x 267 mm W x 185 mm D) (*Maximum height includes base. Total height depends on screen tilt.)
Product weight	5.64 lbs (2.56 kg)
Vibration	ISTA 1A in carton (International Safe Transit Association)
Regulatory compliance	
Safety	CE, c-UL, UL
EMI/EMC	CE, C-tick, FCC Class B, ICES, VCCI
Environmental	Complies with the appropriate requirements of RoHS and WEEE.
Warranty	3 years parts and labor; touchpanel display and overlay components are covered for 1 year

NOTE:

- All nominal levels are at ±10%.
- Specifications are subject to change without notice.
- Shipping dimensions and weights are available at www.extron.com.