

Specifications

AC Net AAP

General

Power

AC Net AAP US model 125 VAC, 50-60 Hz, 12 A max.

AC Net AAP World models 220-240 VAC, 50-60 Hz, 6 A max.

Mounting Mountable into optional AAP frames

Enclosure type Metal

Connector type US NEMA 5-15 P, non-polarized, 3-pin to NEMA 5-15 R, polarized, 3-pin
RJ-45 CAT 5e barrel


Cable length US AC power cord 9' (2.7 m)

Cable outer diameter US AC power cord 0.29" (7.4 mm)

Enclosure dimensions

AC Net AAP US model


Faceplate 1.39" H x 3.50" W (35 mm H x 89 mm W) (double space AAP plate)
Allow at least 2.77" (70 mm) depth in furniture.

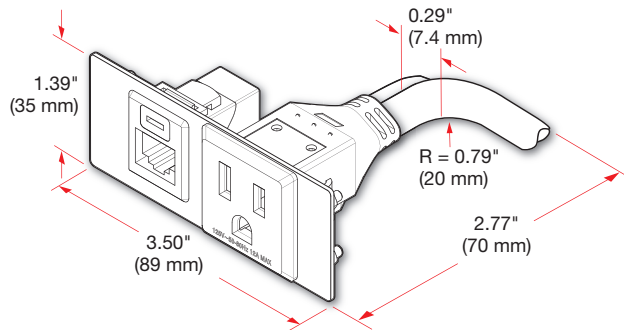

AC Net AAP World models

Faceplate 2.10" H x 3.50" W (53 mm H x 89 mm W)
(three space AAP plate)

Isolation enclosure 1.90" H x 1.80" W x 3.00" D (49 mm H x 46 mm W x 76 mm D)
With AC power cord attached, allow at least 5.0" (127 mm) depth in furniture.

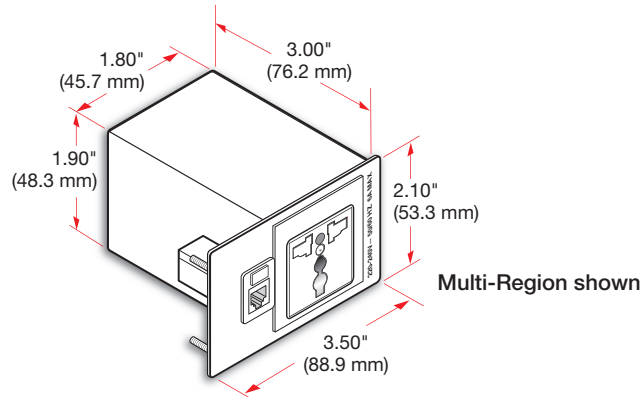

**AC Net AAP
World models**

Specifications • AC Net AAP (Continued)

Product weight

AC Net AAP USA model..... 1.1 lb (0.5 kg)

AC Net AAP World models 0.5 lb (0.2 kg)

Regulatory compliance

USA model c-UL, UL

Environmental CE in compliance with the appropriate requirements of RoHS and WEEE.

Product warranty 3 years parts and labor

NOTE: All nominal levels are at $\pm 10\%$.

NOTE: Specifications are subject to change without notice.

NOTE: Shipping weights and dimensions are available at www.extron.com.

5221-D10