

Specifications

AC+USB 300 Power Module Series for Cable Cubby

General

Power output

AC (US model)..... 125 VAC, 50-60 Hz, 12 A max. total

AC (non-US models)..... 240 VAC, 50-60 Hz, 10 A max. total

USB (US model)

Type C 5 VDC @ up to 3 A, 9 VDC @ up to 3 A, 12 VDC @ up to 3 A, 15 VDC @ up to 3 A, or 20 VDC @ up to 2.25 A. 45 watts max.

Type A 5 VDC @ up to 2 A, 10 watts max.

USB (non-US models)

Type C 5 VDC @ up to 3 A, 9 VDC @ up to 3A, 12VDC @ up to 3 A, 15 VDC @ up to 3 A, or 20 VDC @ up to 2.25 A

Type A 5 VDC @ up to 2 A (5 VDC up to 0.5 A when USB Type C is in 15 VDC or 20 VDC profile)
47.5 total watts combined USB Type C and USB Type A

USB power supply (non-US models)

External

Input: 100-240 VAC, 50-60Hz

Output: 12 VDC, 4.2 A

USB power consumption

US model 63.7 watts

Non-US models

Device 50.9 watts

Device and power supply... 55.4 watts

Temperature/humidity Storage: -40 to +158 °F (-40 to +70 °C) / 10% to 90%, noncondensing
Operating: +32 to +122 °F (0 to +50 °C) / 10% to 90%, noncondensing

Cooling Convection, no vents

USB thermal dissipation

US model

Device and internal power supply
29.6 BTU/hr

Non-US models

Device 11.4 BTU/hr

Device and power supply 27.0 BTU/hr

Mounting Mountable into select Cable Cubby enclosures


Enclosure dimensions

US model 2.40" H x 4.20" W x 6.00" D
(61 mm H x 107 mm W x 152 mm D)


For US AC cord models: Allow an additional 1.00" (25 mm) depth to account for the attached AC power cord bend radius.

For US AC conduit model: Allow an additional 5.00" (127 mm) depth to account for the attached flexible conduit bend radius.

Specification • AC+USB 300 Power Module Series for Cable Cubby (Continued)

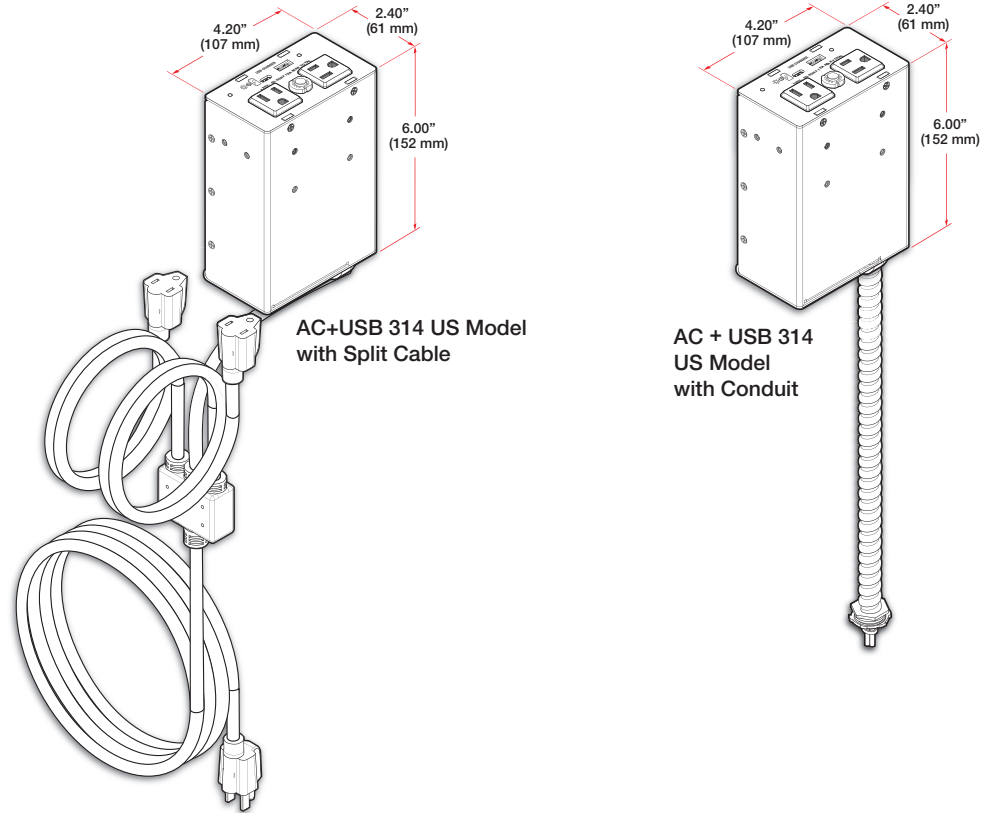

Non-US models..... 2.40" H x 4.20" W x 2.99" D (61 mm H x 107 mm W x 76 mm D)
For non-US AC cord models: Total allowable depth is dependent upon the detachable AC power cord being used. Cable bend radius can vary.



AC+USB 311 EU model

Material.....	Aluminum body
Product weight	
US AC cord model	2.4 lbs (1.1 kg)
US AC conduit model.....	2.3 lbs (1.0 kg)
Non-US AC model.....	1.6 lbs (0.8 kg)
Regulatory compliance	
US models	c-UL, UL
Environmental.....	CE in compliance with the appropriate requirements of RoHS, WEEE
Product warranty	3 years parts and labor
Everlast power supply warranty.....	7 years parts and labor

NOTE: Specifications are subject to change without notice.

NOTE: Shipping weights and dimensions are available at www.extron.com.