
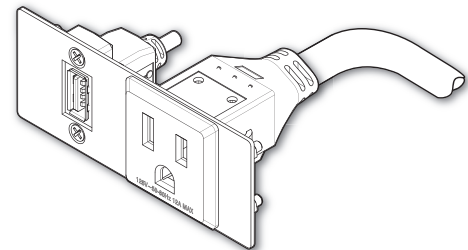
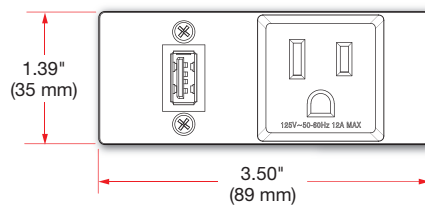


Specifications

AC USB AAP



General

Power	125 VAC, 50-60 Hz, 12 A max.
Mounting	Rack or furniture mountable with optional AAP mounting frames
Enclosure type	Metal
Connector type	
AC power cord	NEMA 5-15 R, polarized, 3-pin to NEMA 5-15 P, non-polarized, 3-pin
USB 2.0	USB 2.0 Type A female to Type A female
USB 3.2	USB 3.2 Gen 1 Type A female to Type B female, reversible
Cable length	
AC power cord	9' (2.7 meter)
USB 2.0	12.30" (312 mm)
USB 3.2	12.90" (327 mm)
Cable outer diameter	
AC power cord	0.29" (7.4 mm)
USB 2.0	0.18" (4.6 mm)
USB 3.2	0.25" (6.4 mm)
USB data rate	
USB 2.0	High speed (480 Mbps)
USB 3.2	SuperSpeed (5 Gbps)
Enclosure dimensions	
Faceplate	1.39" H x 3.50" W (35 mm H x 89 mm W) (double space AAP plate) Allow at least 2.77" (70 mm) depth in the wall or furniture.



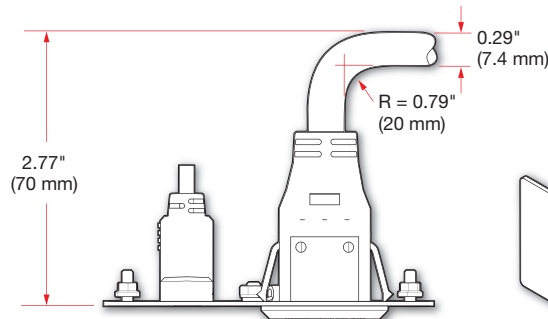


AC USB 2.0 AAP


Specifications • AC USB AAP (Continued)

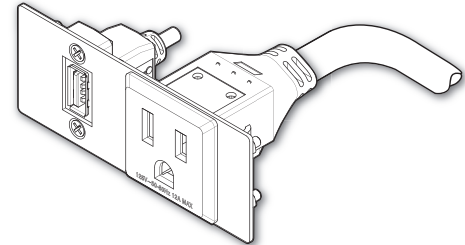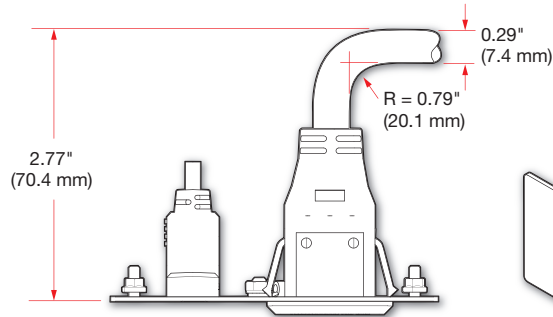

AC USB 3.2 AAP
Shown with USB A

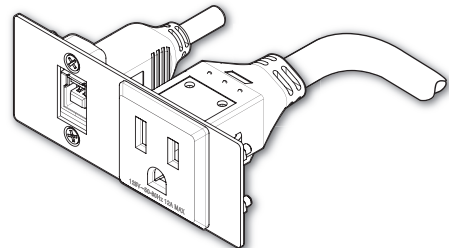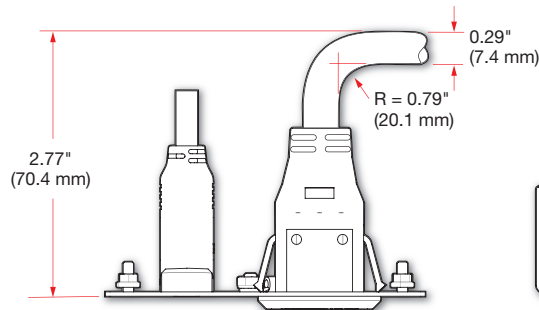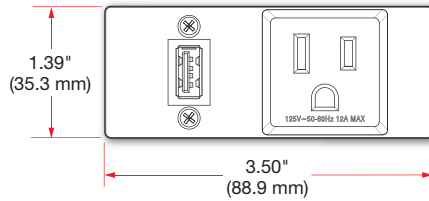

AC USB 3.2 AAP
Shown with USB B

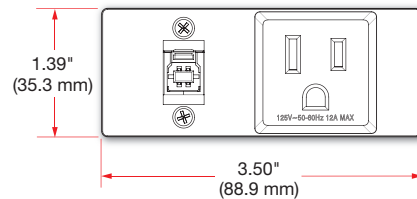

Product weight	
USB 2.0	1.1 lbs (0.50 kg)
USB 3.2	1.2 lbs (0.54 kg)
Compliance	UL, c-UL, CE
Product warranty	3 years parts and labor

NOTE: Specifications are subject to change without notice.

NOTE: Shipping weights and dimensions are available at www.extron.com.

5222-D9