
Extron
Specifications

Cable Cubby® 202


General

Power output


US model	125 VAC, 50-60 Hz, 12 A max total
Non-US models	240 VAC, 50-60 Hz, 10 A max total
Mounting	Furniture mount
Min./max. table thickness	0.25" to 1.75" (6 mm to 44 mm)
Enclosure dimensions	
Top plate (outer rim)	7.99" W x 4.39" D (203 mm W x 112 mm D)
Surface cutout (inside rim)	7.00" W x 3.25" D (178 mm W x 82 mm D)
Enclosure depth	3.20" H (81 mm H) Allow an additional 2.50" (64 mm) depth to account for the attached AC power cord bend radius

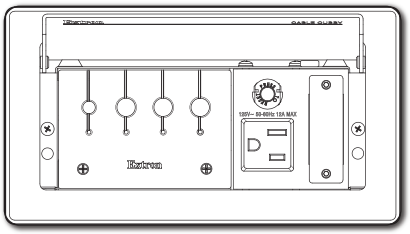


Cable Cubby 222 US

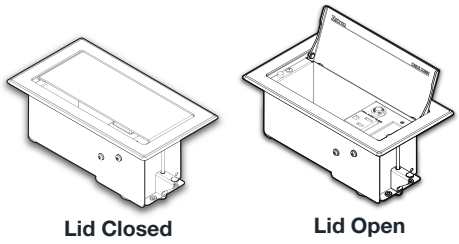


Cable Cubby 222 US

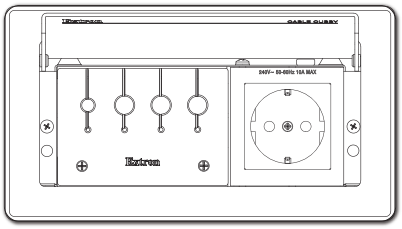

Cable Cubby 202 EU

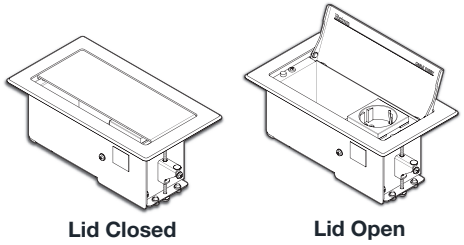

Cable Cubby 202 EU

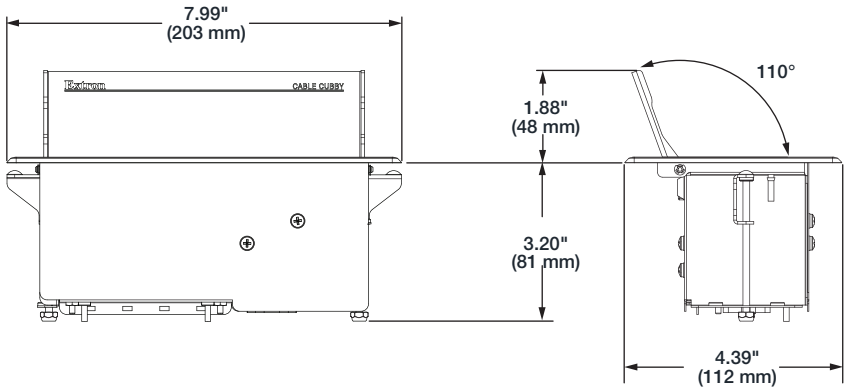

Material	Metal
Product weight	
US model	2.5 lbs (1.1kg)
Non-US models	1.8 lbs (0.8 kg)
Regulatory compliance	CE, NOM, RoHS, WEEE
US model	UL, c-UL
Warranty	3 years parts and labor

NOTE: Specifications are subject to change without notice.

NOTE: Shipping weights and dimensions are available at **www.extron.com**.

6249-D6

© 2024 Extron All rights reserved. All trademarks mentioned are the property of their respective owners. **www.extron.com**