

Specifications

USBC-A

Data

USB specification.....	USB 3.2 (Gen 1), 2.0, 1.1 compatible
USB data rate.....	Up to 5 Gbps

Mechanical


Cable outer diameter	0.18" (4.5 mm)
Bend radius	1.80" (46 mm)

General — physical characteristics

Connectors.....	1 USB-C Male to 1 USB-A Male
Contacts.....	Gold plated
Material.....	Conductors: 30 AWG Tinned Copper Wires Jacket: PVC – Polyvinyl Chloride

Connector dimensions

USB-A male	2.00" L x 0.62" W x 0.31" thick (51 mm L x 16 mm W x 7.9 mm thick)
USB-C male	1.66" L x 0.52" W x 0.29" thick (42 mm L x 13 mm W x 7.4 mm thick)

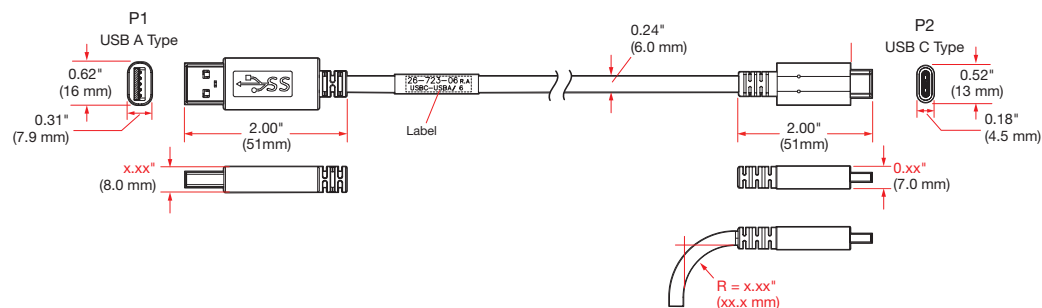

General

Regulatory compliance.....	CE, RoHS, UL-CMX, WEEE
Warranty	Limited Lifetime Performance

NOTE: Specifications are subject to change without notice.

NOTE: All nominal levels are at $\pm 10\%$.

NOTE: Shipping weights and dimensions are available at www.extron.com.

5688-D1