


**Mini-XLR 3-pin male  
to captive screw**




**XLR 3-pin female**




Balanced		Unbalanced	
Pin	Description	Pin	Description
1	External cable (shield/ground)	1	Ground
2	Live ("hot" positive phase)	2	Signal
3	Return signal ("cold" negative phase)	3	Ground

**Mini-XLR 4-pin male  
to captive screw**



**3.5mm stereo mini jack (solder)**

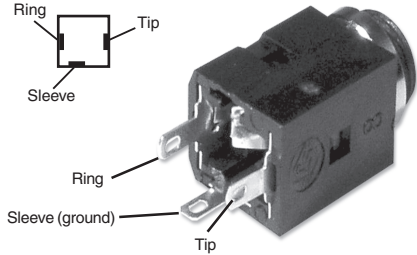

**Additional notes:**

- To determine the correct pin connections of an XLR connector, refer to the device's existing XLR components.
- For pin numbering, examine the body of the XLR connector.



**Extron Electronics, USA**  
1230 South Lewis Street  
Anaheim, CA 92805  
USA  
714.491.1500  
Fax 714.491.1517

**Extron Electronics, Europe**  
Beeldschermweg 6C  
3821 AH Amersfoort  
The Netherlands  
+31.33.453.4040  
Fax +31.33.453.4050

**Extron Electronics, Asia**  
135 Joo Seng Road, #04-01  
PM Industrial Building  
Singapore 368363  
+65.6383.4400  
Fax +65.6383.4664

**Extron Electronics, Japan**  
Daisan DMJ Building 6F  
3-9-1 Kudan Minami  
Chiyoda-ku, Tokyo 102-0074 Japan  
+81.3.3511.7655  
Fax +81.3.3511.7656

68-1058-01  
**Rev. A**  
12 04