
## SMK C TB Series Setup Guide

The Extron SMK C TB Series of tile-bridge ceiling mount kits utilize folding C-rings and modular V-rails.

- 1. Cut a hole in the ceiling using the cutout template provided with the speaker.
- 2. Assemble the two V-rail to the extension bar by fitting the tab on one end into the slot of the other end. Open the V-rail until it locks together, as shown below. Repeat this procedure for the other V-rail.




3. Remove the ceiling tile adjacent to the tile with the hole for the speaker.

## SMK C TB Series Setup Guide

The Extron SMK C TB Series of tile-bridge ceiling mount kits utilize folding C-rings and modular V-rails.

- 1. Cut a hole in the ceiling using the cutout template provided with the speaker.
- 2. Assemble the two V-rail to the extension bar by fitting the tab on one end into the slot of the other end. Open the V-rail until it locks together, as shown below. Repeat this procedure for the other V-rail.




3. Remove the ceiling tile adjacent to the tile with the hole for the speaker.

## SMK C TB Series Setup Guide

The Extron SMK C TB Series of tile-bridge ceiling mount kits utilize folding C-rings and modular V-rails.

- 1. Cut a hole in the ceiling using the cutout template provided with the speaker.
- 2. Assemble the two V-rail to the extension bar by fitting the tab on one end into the slot of the other end. Open the V-rail until it locks together, as shown below. Repeat this procedure for the other V-rail.




3. Remove the ceiling tile adjacent to the tile with the hole for the speaker.

## SMK C TB Series Setup Guide


The Extron SMK C TB Series of tile-bridge ceiling mount kits utilize folding C-rings and modular V-rails.

- 1. Cut a hole in the ceiling using the cutout template provided with the speaker.
- 2. Assemble the two V-rail to the extension bar by fitting the tab on one end into the slot of the other end. Open the V-rail until it locks together, as shown below. Repeat this procedure for the other V-rail.



3. Remove the ceiling tile adjacent to the tile with the hole for the speaker.

- Place both assembled V-rails on the cut ceiling tile and position them equally on either side of the hole. The ends of the V-rails go over the ceiling grid.
- Position the C-ring assembly on the two V-rails so that the C-ring is centered over the hole. 5.

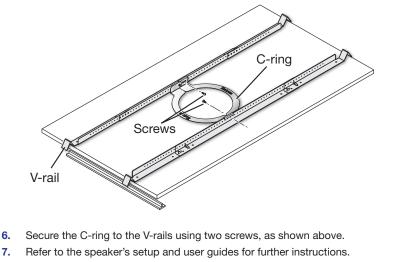

See the Extron Safety and Regulatory Compliance Guide on the Extron website.


68-3397-50 Rev. A

03 19


03 19

© 2019 Extron Electronics. All rights reserved. www.extron.com

- Place both assembled V-rails on the cut ceiling tile and position them equally on either side of the hole. The ends of the V-rails go over the ceiling grid.
- 5. Position the C-ring assembly on the two V-rails so that the C-ring is centered over the hole.

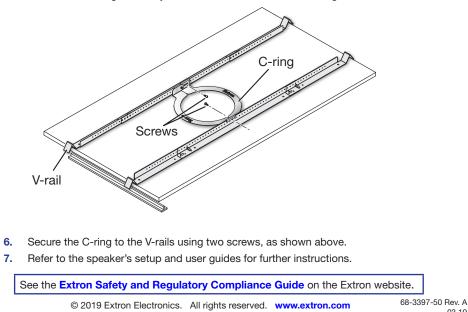

- Place both assembled V-rails on the cut ceiling tile and position them equally on either side 4. of the hole. The ends of the V-rails go over the ceiling grid.
- 5. Position the C-ring assembly on the two V-rails so that the C-ring is centered over the hole.

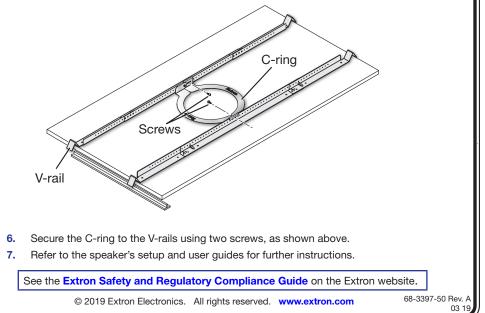

- Place both assembled V-rails on the cut ceiling tile and position them equally on either side 4. of the hole. The ends of the V-rails go over the ceiling grid.
- Position the C-ring assembly on the two V-rails so that the C-ring is centered over the hole. 5.

