


CC 200 Cable Retractor Bracket Kit

The CC 200 Mounting Bracket, part #70-678-10, allows one or two Cable Retractors to be installed in the Cable Cubby® 200 enclosure. The bracket kit adapts the AAP opening of the enclosure to allow the installation of a Cable Retraction System for Cable Cubby® Enclosures.

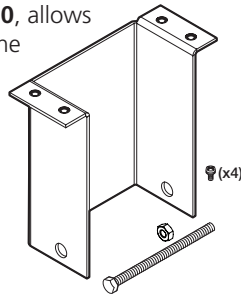



Planning

Before installing the adapter, be certain there is adequate space under the table for the retractable system with the attached bracket.

Determine the retractor mounting orientation: horizontal or vertical.

If only one retractor is mounted, use a filler module, part #70-678-08 in place of the second retractor.

If mounting horizontally, the horizontal bracket kit, part #70-678-00, is required.

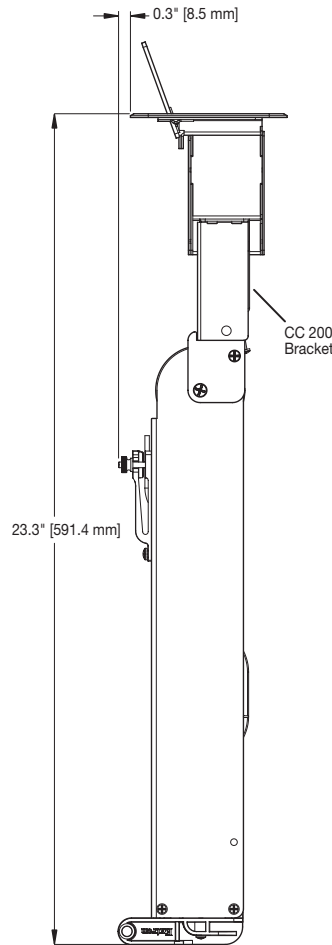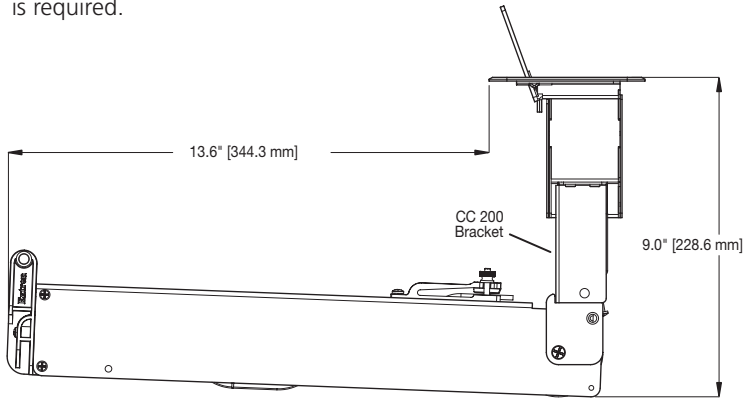

68-1894-50
Rev. A
03 10


Bracket and Retractor Mounting

WARNING: Disconnect power from the Cable Cubby 200 power module before beginning installation.

- Using the mounting bolt supplied with the CC 200 kit (1/4-20 x 3 in), mount the CC 200 bracket to the retractor as shown on the right. Do not overtighten the bolt.

Once the retractor is mounted to the bracket, the assembly may be installed into the enclosure.

- The cable stops and connectors may be too large to fit through the AAP opening at the same time as the retractor. Pull a short amount of cable out of the retractor and push it through the AAP opening before installing the retractor/bracket assembly.
- Press the bracket and retractor assembly against the bottom of the enclosure, lining the bracket holes up with the AAP mounting holes on the enclosure. Fasten from the top using the supplied four screws.
- Refer to the **Cable Retraction System for Cable Cubby Enclosures User's Manual** located at www.extron.com for further retractor mounting instructions.

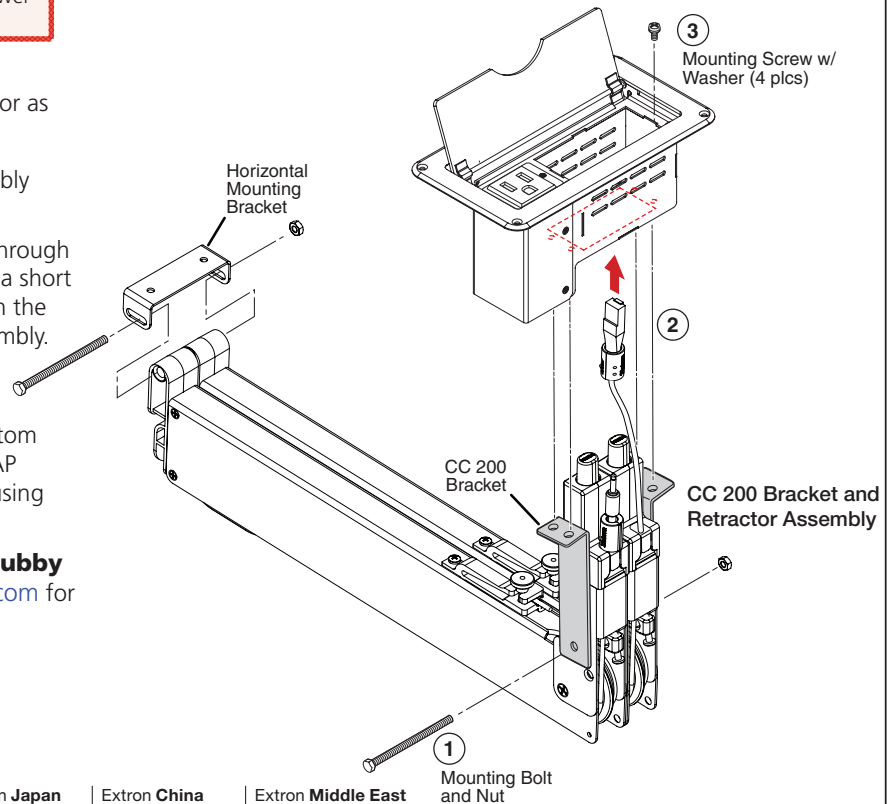

Extron USA - West
Headquarters
+800.633.9876
Inside USA / Canada Only
+1.714.491.1500
+1.714.491.1517 FAX

Extron USA - East
+800.633.9876
Inside USA / Canada Only
+1.919.863.1794
+1.919.863.1797 FAX

Extron Europe
+800.3987.6673
Inside Europe Only
+31.33.453.4040
+31.33.453.4050 FAX

Extron Asia
+800.7339.8766
Inside Asia Only
+65.6383.4400
+65.6383.4664 FAX

Extron Japan
+81.3.3511.7655
+81.3.3511.7656 FAX

Extron China
+400.883.1568
Inside China Only
+86.21.3760.1568
+86.21.3760.1566 FAX

Extron Middle East
+971.4.2991800
+971.4.2991880 FAX