

IMPORTANT:
Refer to www.extron.com for the complete user guide and installation instructions before connecting the product to the power source.

HRP 104 AAP • Installation Guide

The HRP 104 AAP is a one unit high, half rack wide, mounting panel for up to four single-space or two double-space Architectural Adapter Plates (AAPs). All AAPs must be purchased separately. A full range of available AAPs can be found on the Extron website (www.extron.com).

Extron does not provide rails for the rack system. These must be purchased and installed separately (see the user guide provided by the supplier). The distance between the rails must be half the standard rack width (8.85 inches or 22.5 cm) between the inside edges of the rail (see the figure below).

Install the AAPs


Install the AAPs in the HRP 104 AAP before the plate is mounted in the rack.

1. Place the AAPs in the slots and secure them to the HRP 104 AAP, using the nuts provided with the AAP.
2. If necessary, fill any unused spaces with single (part number **70-090-11**) or double (part number **70-090-12**) blank AAP plates.

Mount the HRP 104 AAP

Mount the HRP 104 AAP in the rack as follows:

1. Position the HRP 104 AAP so that the mounting plate is level and the two holes at each end align with holes in the rack.
2. Secure the mounting rack to the rails using the four provided #10-32 screws with captive washers.
3. Run cables to the front and rear panels of the AAPs. For information about the cable requirements of the AAP, see the user guide for that AAP (www.extron.com).
4. Connect the cables to the AAPs.
5. Test the AAPs to ensure they are working correctly.

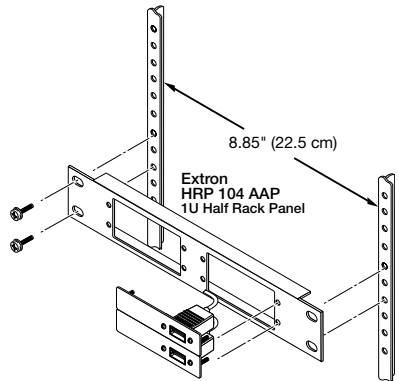

Extron USA Headquarters +800.633.9876 (Inside USA/Canada Only)		Extron Europe +800.3987.6673 (Inside Europe Only) +31.33.453.4040 +31.33.453.4050 FAX		Extron India 1800.3070.3777 (Inside India Only) +91-80 3055.3777 +91 80 3055 3737 FAX	
Extron USA - West +1.714.491.1500 +1.714.491.1517 FAX	Extron USA - East +1.919.850.1000 +1.919.850.1001 FAX	Extron Japan +81.3.3511.7655 +81.3.3511.7656 FAX		Extron China +4000.EXTRON +4000.398766 Inside China Only	
Extron Asia +800.7339.8766 Inside Asia Only +65.6383.4400 +65.6383.4664 FAX	Extron Middle East +971.4.2991800 +971.4.2991880 FAX	Extron Korea +82.2.3444.1571 +82.2.3444.1575 FAX		+86.21.3760.1568 +86.21.3760.1566 FAX	

68-2264-01
Rev. A
05 12