

VCM 100 AAP and MAAP

The Extron VCM 100 AAP and VCM 100 MAAP are remote volume/mute controllers designed to work with Extron products (such as the MPA 122 mini power amplifier).

Mounted into standard Extron AAP or MAAP mounting frames, the VCM 100 AAP and VCM 100 MAAP each have a 10k ohm potentiometer volume control knob and mute button.

The Mute button toggles between mute and un-mute, turning bright red to indicate mute, and dim green to indicate un-mute.

Remote connector pin configuration


As shown below right, **Pin 1** is a 10 VDC reference voltage. **Pin 2** is volume and mute control with DC voltage; the range is 0 to 10 V, where 0 V is mute and 10 V provides maximum volume. **Pin 3** is ground.

NOTE All nominal levels are at $\pm 10\%$.


Audio level setting procedure

To set the system level to not exceed the maximum volume in using the VCM 100, do the following:

1. Reduce the power amplifier volume to minimum.
2. Turn the Volume knob on the VCM 100 to the maximum position.
3. Slowly turn up the power amplifier volume to the maximum undistorted sound level allowed for the application.



As shown below, the Extron VCM 100 AAP and VCM 100 MAAP serve to remotely control volume and mute with Extron products (such as the MPA 122 Mini Power Amplifier).

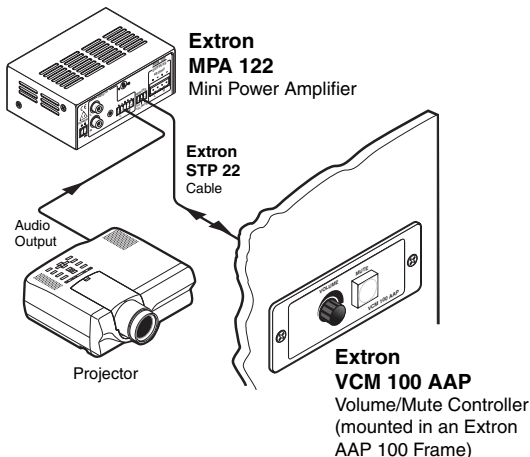

68-1032-01
Rev. A
03 05



Extron Electronics, USA
1230 South Lewis Street
Anaheim, CA 92805
USA
714.491.1500
Fax 714.491.1517

Extron Electronics, Europe
Beeldschermweg 6C
3821 AH Amersfoort
The Netherlands
+31.33.453.4040
Fax +31.33.453.4050

Extron Electronics, Asia
135 Joo Seng Road, #04-01
PM Industrial Building
Singapore 368363
+65.6383.4400
Fax +65.6383.4664

Extron Electronics, Japan
Kyodo Building
16 Ichibancho
Chiyoda-ku, Tokyo 102-0082 Japan
+81.3.3511.7655
Fax +81.3.3511.7656