


CC 200 Cable Retractor Adapter Kit

The CC 200 Bracket Kit, part #70-678-10, allows one or two Cable Retractors to be installed in the Cable Cubby® 200 enclosure. The bracket kit adapts the AAP opening of the enclosure to allow the installation of a Cable Retraction System for Cable Cubby Enclosures.





Planning

Before installing the adapter, be certain there is adequate space under the table for the retractable system with the attached bracket.

Determine the retractor mounting orientation: horizontal or vertical.

If only one retractor is mounted, use a filler module, part #70-678-08 in place of the second retractor.

If mounting horizontally, the horizontal bracket kit, part #70-678-00, is required.

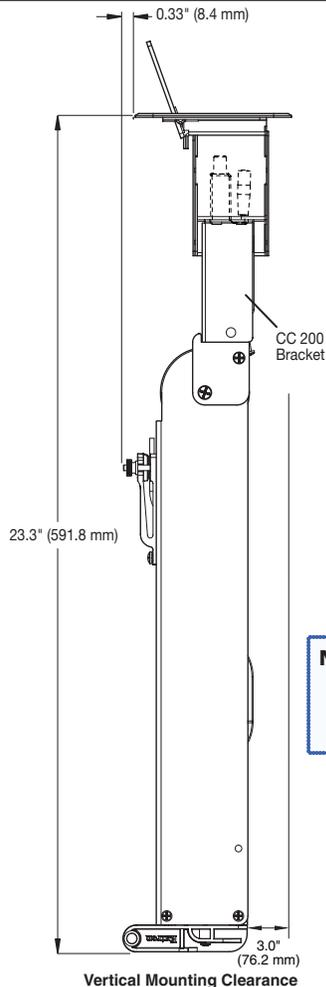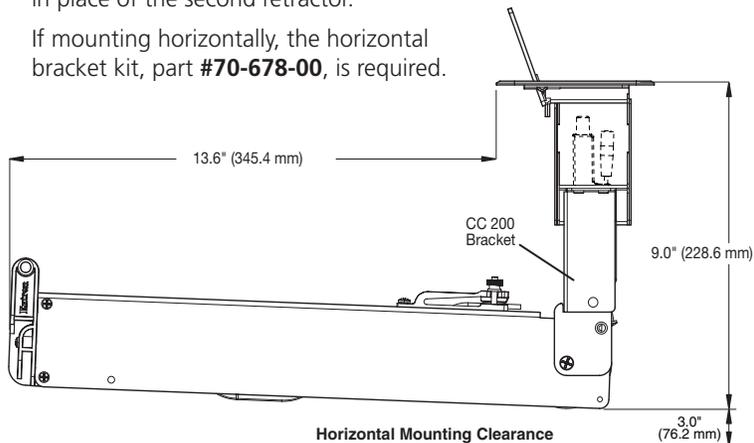

NOTE: To prevent objects from impeding cable retraction, ensure at least 3 inches of clearance from the exposed cable side of the enclosure.


Bracket and Retractor Mounting

WARNING: Disconnect power from the Cable Cubby 200 power module before beginning installation.

- Using the mounting bolt supplied with the CC 200 kit (1/4-20 x 3 in), mount the CC 200 bracket to the retractor as shown on the right. Do not overtighten the bolt.

Once the retractor is mounted to the bracket, the assembly can be installed into the enclosure.

- The cable stops and connectors may be too large to fit through the AAP opening at the same time as the retractor. Pull a short amount of cable out of the retractor and push it through the AAP opening before installing the retractor/bracket assembly.
- Press the bracket and retractor assembly against the bottom of the enclosure, lining the bracket holes up with the AAP mounting holes on the enclosure. Fasten from the top using the supplied four screws.
- Refer to the *Cable Retraction System for Cable Cubby Enclosures User Guide* at www.extron.com for further retractor mounting instructions.

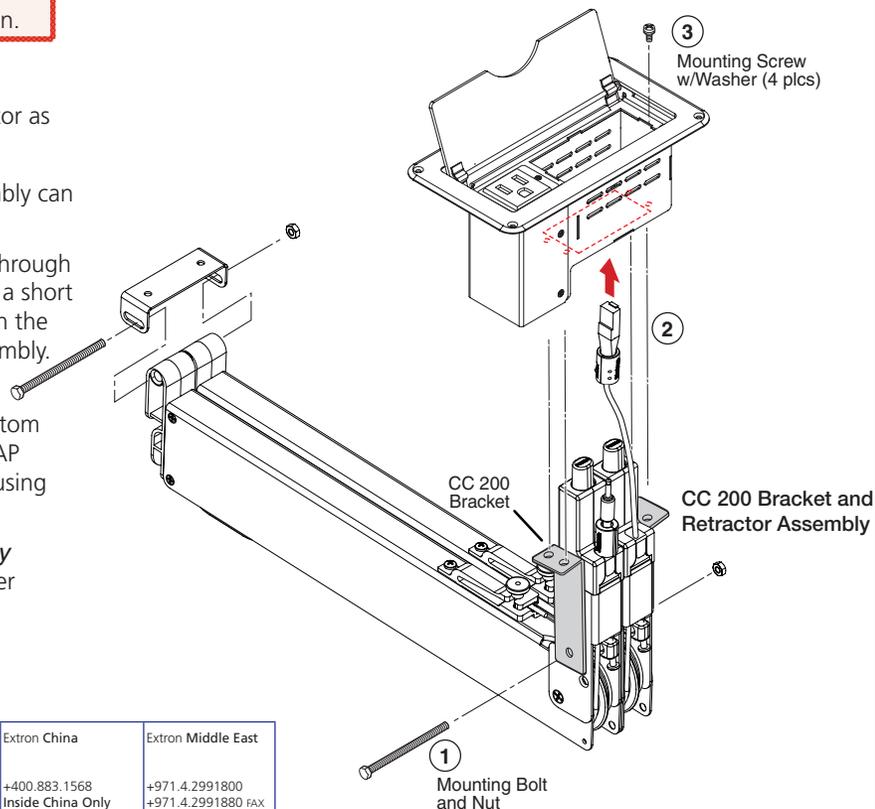

Extron USA - West Headquarters	Extron USA - East	Extron Europe	Extron Asia	Extron Japan	Extron China	Extron Middle East
+800.633.9876 Inside USA and Canada Only	+800.633.9876 Inside USA and Canada Only	+800.3987.6673 Inside Europe Only	+800.7339.8766 Inside Asia Only	+81.3.3511.7655 +81.3.3511.7656 FAX	+400.883.1568 Inside China Only	+971.4.2991800 +971.4.2991800 FAX
+1.714.491.1500 +1.714.491.1517 FAX	+1.919.863.1794 +1.919.863.1797 FAX	+31.33.453.4040 +31.33.453.4050 FAX	+65.6383.4400 +65.6383.4664 FAX		+86.21.3760.1568 +86.21.3760.1566 FAX	